



Nio

DIGITAL SIGNAGE

**The all-new
Nio Digital Signage
display with onboard
Android 11**

- HD viewing experience
- Landscape & portrait mode
- Beautiful picture
- Even, minimal bezel
- Integrated Android OS
- Integrated software options



Product Features

Two USB 2.0 Ports
Physical key
Loudspeaker
4K Ultra HD Display
Included USB WiFi Module

Hidden remote reception
Even, minimal bezel
Supports landscape and portrait mode
Anti-glare panel
Gyroscope

Display

Size: 43"
Panel Type: VA
Response Time: 6.5 ms
Aspect Ratio: 16:9
Display Area: 941.184mm x 529.416mm
Resolution: 3840(H) x 2160(V)
Pixel Pitch: 0.2451mm x 0.2451mm
Refreshing Frequency: 60Hz

Display Color: 1.07B (10 bit)
NTSC: 72%
Contrast Ratio: 5000:1
Viewing Angle: 178° (H/V)
Brightness with glass (min): 400 cd/m2
Brightness with glass (typ): 450 cd/m2
Lifetime: ≥ 50,000 Hours
Back Light Unit: DLED

Display Operating System

System Version: Android 11.0
CPU: A55 x 4
GPU: Mali-G52MP2

RAM: 4GB
ROM: 32GB

Audio

Sound Channel: 2.0
Output Power: 2 x 10W

Sound Pressure Level: 81dB
Peak Power: 54W

Power

Power Requirements: 100-240V ~ 50/60Hz 2.5A
Standby Power: ≤0.5W

Typical Power: 110W
Overall Power (max): 215W

Display Connections

HDMI Input: 2
HDMI Output: 1
USB 2.0: 1
USB 3.0: 1
USB-C: 1

Audio Output: 1
SPDIF: 1
RS232 Port: 1
RJ45 In: 1

Physical Specifications

Dimension L*H*D: 964.6 x 552.5 x 71.4mm /
37.98" x 21.75" x 2.81"
Package Dimension L*W*H: 1056 x 156 x 672mm /
41.57" x 6.14" x 26.46"

Net Weight: 9.90 kg / 21.82 lbs
Gross Weight: 13.85 kg / 30.53 lbs
Machine & Wall Mount Thickness: 95.4mm / 3.75"
Wall-hanging Screw Spec: M6 x 12mm
VESA: 200 x 200mm

Accessories

American Standard Power Cord x1
Remote Control x1

HDMI Cable x1
Nio Air Mouse Controller x1

Environmental Conditions

Operation Temperature: 0°C~40°C / 32°F~104°F
Operation Humidity: 10%~90%

Storage Temperature: -20°C~60°C / -4°F~140°F
Storage Humidity: 10%~90%
Altitude: Below 5000m / 16404.2 ft


Integrated Software

Clear Touch Command™: Remote access to the display for power saving schedules, emergency messaging and usage statistics

Clear Touch Collage™: Seamless screen mirror/casting to the panel from multiple devices
Clear Digital Sho™: Web content management for digital signage with paid subscription

WiFi Module (Included)

Wireless Module: USB WiFi Dongle: SI07B

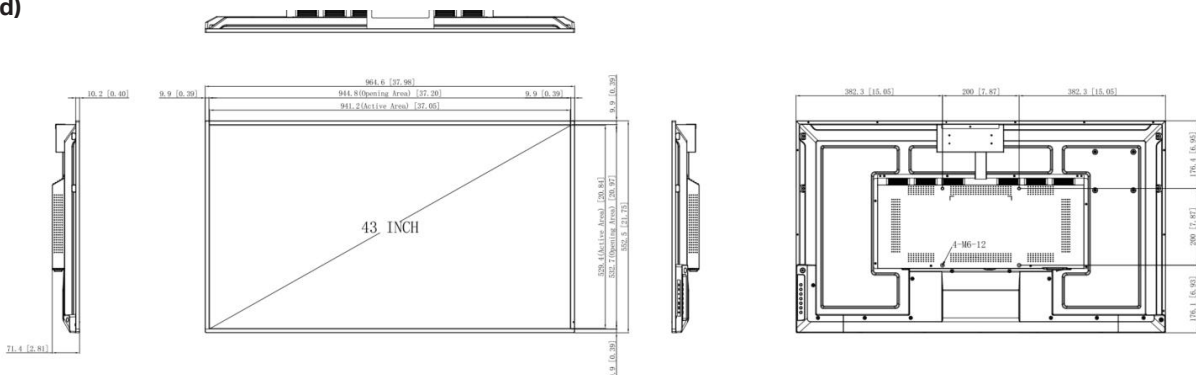

Contact a Clear Touch Sales Representative for pricing or a demo:

864.973.7973 | getcleardigital.com/demo